



皮带官网
Belt website



电子目录
Electronic directory

CONTACT US

关于我们

电话/Tel : +86 13932918987

邮箱/Mail : azhangshb@163.com

网址/Web : <http://www.bsbelts.com>

Q Q : 1044352325

办公室地址: 河北省邢台市泉南东街唐宁国际A-2301室

Office Address: Room A-2301, Tangning International, Quannan East Street, Xingtai City, Hebei Province

工厂地址: 河北省邢台市巨鹿县工业园区

Factory Address: Julu County Industrial Park, Xingtai City, Hebei Province



河北勃硕汽车科技有限公司

HEBEI BOSHUO AUTO TECH CO., LTD

WWW.BSBELTS.COM

ENTERPRISE INTRODUCTION 企业简介

河北勃硕汽车科技有限公司成立于 2014 年, 是一家专业从事设计、研究、生产和销售各种传动带的公司。我们主要生产和销售 V 带、切边 V 带、多楔带、工业同步带、汽车同步带等多种传动带产品。

我们拥有一支高素质的技术团队和先进的生产设备, 致力于为客户提供高品质、可靠性强的传动带产品。我们不断创新、追求卓越, 以满足客户的需求为己任, 竭诚为客户提供优质的产品和服务。

感谢您选择河北勃硕汽车科技有限公司作为您的合作伙伴。我们期待着与您的合作, 并为您提供最优质的产品和服务。

Hebei Boshuo Automobile Technology Co., Ltd. was established in 2014. It is a company specializing in the design, research, production and sales of various transmission belts. We mainly produce and sell V-belts, cut-edge V-belts, V-belts, industrial timing belts, automotive timing belts and other transmission belt products.

We have a high-quality technical team and advanced production equipment, and are committed to providing customers with high-quality, reliable transmission belt products. We are constantly innovating and pursuing excellence, taking meeting the needs of customers as our mission, and wholeheartedly providing customers with high-quality products and services.

Thank you for choosing Hebei Boshuo Automobile Technology Co., Ltd. as your partner. We look forward to cooperating with you and providing you with the best quality products and services.

企业文化

CORPORATE CULTURE

品质
QUALITY匠心
INGENUITY努力
STRIVE

勃硕价值观 BOSHUA VALUES

以诚为本，以信为用。
乐观向上，永不言弃

勃硕愿景 BOSHUA VISION

打造行业品牌，

▶▶ 树立行业形象，

▶▶ 成就百年勃硕

勃硕使命 BOSHUA MISSION

给客户最放心的产品，
给员工最好的福利

3

4

Corporate
honor

5

客户分布

Customer distribution



我们的产品已成功进入美国、加拿大、印度、巴基斯坦、印度尼西亚等20多个国家市场，并且与当地的客户建立了长期的业务关系。公司注重产品的品质和可靠性，以满足全球客户的需求。这些客户涉及多个领域，包括汽车、工业、农业等，公司产品在这些领域受到了客户的广泛认可和好评。

Our products have successfully entered the markets of more than 20 countries such as the United States, Canada, India, Pakistan, and Indonesia, and have established long-term business relationships with local customers. The company focuses on product quality and reliability to meet the needs of customers around the world. These customers involve many fields, including automobile, industry, agriculture, etc., and the company's products have been widely recognized and praised by customers in these fields.

6

PIONEERING
AND ENTERPRISING
INNOVATION SERVICE

CONTENTS

多楔带
V-RIBBED BELT

汽车 V 带
V-BELT

切边带
RAW EDGE V-BELT

包布带
WRAPPED V-BELT

汽车同步带
AUTO TIMING BELT

工业同步带
INDUSTRIAL TIMING BELT

09

11

14

16

17

19

>>> 多楔带 V-RIBBED BELTS

产品特点


PRODUCT FEATURES

橡胶多楔带是一种用于传递动力的皮带，具有比V带和平带更好的柔性和强度，并广泛应用于机械、工业和汽车等领域。使用氯丁胶和三元乙丙材料制成的多楔带具有耐热、耐磨、耐老化耐臭氧等优良性能，在高温、反向和小带轮环境中使用更佳。

V-Ribbed belt is a kind of belt used to transmit power, which has better flexibility and strength than V-belt and flat belt, and is widely used in machinery, industry and auto cars and other fields. The V-ribbed belt made of neoprene material (EPDM) has excellent properties such as heat resistance, oil resistance, aging resistance and ozone resistance, and performs better in high-speed, reverse and small pulley environments.

结构 Structure

编号 NO.	名称 Name	功能 Function	材料 Material
1	顶布 Top Fabric	保护内部帘线层 Protect the living tensile member	涤纶布 Polyester Cotton Canvas
2	缓冲胶 Buffer Rubber	缓冲胶层可增加带体的弹性 Support and protect the adhesive force of the tensile member	CR
3	抗张体 Tensile Member	传递动力的主要部分 Central material to pass the dynamic force and ensure high strength	聚酯 Polyester
4	底胶 Bottom Rubber	保持带体的形状并防止磨损 Maintain the shape of the rubber and prevent abrasion	CR



特性 Features

拥有平滑的柔软张紧特性和V带紧凑高效的优点。
使用氯丁胶材料，具有优良的耐热和耐油性。
曲挠性能好，耐老化和耐臭氧性能比一般不饱和橡胶更好。
在高速运转、反向使用、小带轮等运转环境中的使用寿命高。
加入短纤维增强，可承受较大的离心力，增加带体的强度，减少受力后变形。

It has the soft and tough characteristics of flat belts and the advantages of compact and efficient V belts. Using neoprene material, it has good heat and oil resistance.

Good flexibility, aging resistance and ozone resistance are better than general unsaturated rubber.

High rotation rate in operating environments such as high speed rotation, reverse deflection, small pulleys, etc.

Short fiber reinforcement is added to withstand high lateral pressure, increase the pressure resistance of the belt wedge, and reduce deformation after stress.

截面尺寸 Section size of v-ribbed belt

型号 Type	模距 Ribsection	楔角 Angle of rib	带高 Belt thickness	模数 Rib numbers	长度 Length (mm)
PJ	2.34	40	4	3-36	495-1750
PK	3.56	40	4-6	3-25	495-2875
PL	4.7	40	10	3-16	900-2875

应用：汽车、洗衣机、干衣机、机床等机械加工业、运动器材等
Application: Automobile, washing machine, dryer and fitness machine etc.

多楔带型号与尺寸

TYPE & SIZE OF V-RIBBED BELTS

PL

型号 Type	900-2875
模数 Rib Number	3~16

PL-1270	PL-1486	PL-1803	PL-2134	PL-2705
PL-1295	PL-1511	PL-1842	PL-2197	PL-2743
PL-1334	PL-1562	PL-1943	PL-2235	PL-2845
PL-1372	PL-1613	PL-1981	PL-2324	PL-2896
PL-1397	PL-1664	PL-2019	PL-2362	
PL-1422	PL-1715	PL-2070	PL-2477	
PL-1435	PL-1765	PL-2096	PL-2515	

多楔带型号与尺寸

TYPE & SIZE OF V-RIBBED BELTS

PJ

型号 Type	495-1750
模数 Rib Number	3~36

PJ-498	PJ-640	PJ-796	PJ-914	PJ-1016	PJ-1117	PJ-1300	PJ-1570
PJ-505	PJ-646	PJ-801	PJ-917	PJ-1020	PJ-1124	PJ-1315	PJ-1581
PJ-508	PJ-651	PJ-806	PJ-927	PJ-1022	PJ-1130	PJ-1321	PJ-1593
PJ-521	PJ-656	PJ-810	PJ-931	PJ-1028	PJ-1137	PJ-1330	PJ-1600
PJ-528	PJ-660	PJ-813	PJ-940	PJ-1032	PJ-1144	PJ-1337	PJ-1635
PJ-533	PJ-666	PJ-816	PJ-942	PJ-1036	PJ-1152	PJ-1341	PJ-1641
PJ-541	PJ-670	PJ-822	PJ-944	PJ-1041	PJ-1156	PJ-1355	PJ-1636
PJ-552	PJ-674	PJ-827	PJ-952	PJ-1046	PJ-1166	PJ-1394	PJ-1650
PJ-559	PJ-685	PJ-830	PJ-955	PJ-1054	PJ-1168	PJ-1396	PJ-1655
PJ-571	PJ-690	PJ-838	PJ-958	PJ-1060	PJ-1180	PJ-1420	PJ-1660
PJ-586	PJ-700	PJ-841	PJ-965	PJ-1067	PJ-1185	PJ-1425	PJ-1696
PJ-594	PJ-711	PJ-846	PJ-966	PJ-1072	PJ-1194	PJ-1444	PJ-1712
PJ-600	PJ-720	PJ-851	PJ-970	PJ-1078	PJ-1216	PJ-1456	PJ-1725
PJ-605	PJ-736	PJ-856	PJ-978	PJ-1080	PJ-1220	PJ-1460	PJ-1730
PJ-606	PJ-740	PJ-864	PJ-981	PJ-1087	PJ-1225	PJ-1480	PJ-1735
PJ-610	PJ-752	PJ-870	PJ-986	PJ-1089	PJ-1230	PJ-1488	PJ-1740
PJ-614	PJ-761	PJ-876	PJ-991	PJ-1092	PJ-1235	PJ-1510	PJ-1751
PJ-620	PJ-766	PJ-880	PJ-996	PJ-1098	PJ-1242	PJ-1511	
PJ-626	PJ-772	PJ-886	PJ-1003	PJ-1102	PJ-1256	PJ-1516	
PJ-635	PJ-776	PJ-900	PJ-1008	PJ-1106	PJ-1270	PJ-1523	
PJ-638	PJ-787	PJ-906	PJ-1014	PJ-1112	PJ-1290	PJ-1551	

PK

型号 Type	495-4145
模数 Rib Number	3~36

PK-495	PK-790	PK-965	PK-1185	PK-1410	PK-1655	PK-1920	PK-2300
PK-503	PK-795	PK-970	PK-1190	PK-1415	PK-1660	PK-1925	PK-2305
PK-515	PK-800	PK-975	PK-1205	PK-1420	PK-1665	PK-1940	PK-2320
PK-540	PK-805	PK-980	PK-1215	PK-1435	PK-1680	PK-1945	PK-2340
PK-550	PK-810	PK-985	PK-1220	PK-1445	PK-1695	PK-1970	PK-2350
PK-555	PK-815	PK-990	PK-1225	PK-1450	PK-1700	PK-1980	PK-2365
PK-595	PK-820	PK-995	PK-1235	PK-1460	PK-1705	PK-2000	PK-2370
PK-600	PK-825	PK-1000	PK-1245	PK-1470	PK-1710	PK-2020	PK-2375
PK-605	PK-830	PK-1010	PK-1250	PK-1475	PK-1720	PK-2040	PK-2400
PK-615	PK-835	PK-1020	PK-1265	PK-1485	PK-1730	PK-2050	PK-2415
PK-630	PK-840	PK-1025	PK-1270	PK-1495	PK-1745	PK-2055	PK-2430
PK-635	PK-850	PK-1035	PK-1275	PK-1505	PK-1750	PK-2065	PK-2450
PK-650	PK-855	PK-1040	PK-1280	PK-1520	PK-1765	PK-2080	PK-2460
PK-670	PK-860	PK-1045	PK-1295	PK-1525	PK-1770	PK-2090	PK-2470
PK-685	PK-865	PK-1055	PK-1300	PK-1530	PK-1780	PK-2100	PK-2475
PK-695	PK-870	PK-1065	PK-1310	PK-1555	PK-1790	PK-2110	PK-2490
PK-700	PK-875	PK-1070	PK-1325	PK-1560	PK-1795	PK-2120	PK-2520
PK-710	PK-885	PK-1085	PK-1330	PK-1570	PK-1800	PK-2130	PK-2550
PK-720	PK-890	PK-1090	PK-1335	PK-1585	PK-1815	PK-2138	PK-2580
PK-735	PK-910	PK-1105	PK-1346	PK-1595	PK-1820	PK-2150	PK-2600
PK-745	PK-915	PK-1110	PK-1350	PK-1650	PK-1830	PK-2175	PK-2700
PK-750	PK-920	PK-1120	PK-1355	PK-1610	PK-1845	PK-2200	PK-2750
PK-760	PK-930	PK-1135	PK-1365	PK-1615	PK-1850	PK-2225	PK-2800
PK-765	PK-935	PK-1145	PK-1375	PK-1620	PK-1860	PK-2255	PK-2850
PK-775	PK-945	PK-1150	PK-1390	PK-1630	PK-1870	PK-2260	PK-2875
PK-780	PK-950	PK-1165	PK-1395	PK-1640	PK-1880	PK-2270	PK-3136
PK-785	PK-960	PK-1175	PK-1405	PK-1650	PK-1900	PK-2285	PK-4145

包布帶 WRAPPED V-BELT

产品特点 Product Features

我们的新一代增强型耐油三角带采用切边 V 带生产工艺，主要材料为耐油、耐热复合橡胶，骨架材料采用特殊的聚酯线绳制成。这种三角带不同于普通三角带的生产工艺。

Our company's new generation of reinforced oil-resistant V-belts use the production process of edge-cut V-belts. The main material is oil-resistant and heat-resistant composite rubber, and the skeleton material is made of special polyester ultra hard cord. This V-belt is different from the production process of ordinary V-belts.

结构 Structure

編號 No.	名稱 Name	功能 Function	材料 Material
1	外包布 Outside Fabric	保護內部結構 Protect the living tensile member	聚酯帆布 Polyester Canvas
2	抗張膜 Tensile Member	傳遞動力以撐心材料 core material to pass the dynamic force	鋼線繩 Wire Rope
3	頂胶 Top Rubber	保持膠帶上的圓錐形狀 Maintain the top shape of the adhesive tape	NR, CR, SBR
4	缓冲胶 Buffer Rubber	承受和緩衝張力及衝擊力 Support and protect the adhesive force of the tensile member	NR, CR, SBR
5	底胶 Bottom Rubber	保持膠帶下的圓錐形狀 Maintain the bottom shape of the adhesive tape	NR, CR, SBR



特征
Feature

- | | |
|--|---|
| <ul style="list-style-type: none"> ● 内部采用双层保护设计，耐久性更强。 ● 采用特选橡胶，寿命更长且伸长率低。 ● 具备出色的耐磨、耐油及耐腐蚀性能。 ● 采用防静电设计，确保使用安全。 ● 运转中摩擦系数小，传动效果优异。 ● 运转中噪音低，使用更加舒适。 | <ul style="list-style-type: none"> ● The inner is protected by wrapping cloth, which is more durable. ● Using special rope rubber, the life is longer and the elongation is small. ● Has excellent heat resistance, oil resistance and wear resistance. ● Adopt anti-static design to ensure safe use. ● The friction coefficient is small during operation, and the transmission effect is excellent. ● Low noise during operation, more comfortable to use. |
|--|---|

工业 V 带型号与尺寸 Type & Size

工业 V 带尺寸范围 Dimension range

Size No	Range ISO(mm)	Effective Length(mm)	Size No	Range ISO(mm)	Effective Length(mm)
XPZ	600-1875	600-1875	XPZ	600-1875	600-1875
XPA	732-2200	732-2200	XPA	732-2200	732-2200
XPB	1016-2200	1016-2200	注：若用戶所需規格不在此範圍內，可另行洽詢新誠達生產，本公司能按照國產用戶需求來設計。		
XPC	1016-2200	1016-2200			

包布帶截面尺寸 Section Size of Wrapped belt

型号	上宽 (mm)	带高 (mm)	角度 (°)	可生产范围 (In)
Type	Top width	Belt height	Angle	production range
M	10	6	40	15-120
A	13	8	40	18-160
B	17	11	40	22-550
C	22	14	40	33-600
D	32	19	40	80-600
E	38	23	40	110-600

窄型包布帶截面尺寸 Cross Size of Narrow Wrapped Belt

型号	上宽 (mm)	壁厚 (mm)	角度 (°)	可生产范围 (inch)
Type	Top width	Wall Thickness	Angle	production range
SPZFM	9.7	8	40	500-6850
SPA	12.7	10	40	500-8000
SPB	16.3	13	40	600-8000
SPC	22	18	40	1000-12500
3V(9N)	9.5	8	40	20-200
SV(13N)	16	13.5	40	50-355

同步帶 TIMING BELT

产品特点 Product Features

同步带传动是一种新型的传动方式，利用带齿与带轮的啮合来传递动力，兼具齿轮转动、链传动和带传动的各自优点。

Timing belt transmission is a new type of transmission mode, which uses the meshing of the belt teeth and the pulley to transmit power, and has the respective advantages of gear rotation, chain transmission and belt transmission.

结构 Structure

编号 No.	名称 Name	功能 Function	材料 Material
1	顶胶 Top Rubber	保护内嵌抗张体 Protect the lining tensile member	CR
2	抗张体 Tensile Member	传递动力的核心部件,防止皮带伸长 Transfer the tensile member and maintain the shape of the rubber, prevent the rubber from stretching	玻纤 Glass Fiber
3	齿胶 Teeth Rubber	保护抗张体并保持齿部形状 Protect the tensile member and maintain the shape of the rubber	CR
4	齿布 Teeth Fabric	具有极好的耐磨性,从而延长使用寿命 Excellent frictional resistance which prolongs the service life of product	尼龙布 Nylon Fabric





特性 Feature


- 运转时噪音低，使用效果好；
 - 不需要使用润滑油，便于维护；
 - 能够防止打滑发生，使用更加可靠；
 - 能够节省燃料，具有良好的经济性；
 - 具有极高的机械效率，传动效果更加优异。
-
- The noise is low during operation, and the use effect is good.
 - No need to use lubricating oil, easy to maintain.
 - It can prevent slippage and make the use more reliable.
 - It can save fuel and has good economy.
 - It has extremely high mechanical efficiency and the transmission effect is more excellent.

汽车同步带截面尺寸

121-ZA-19

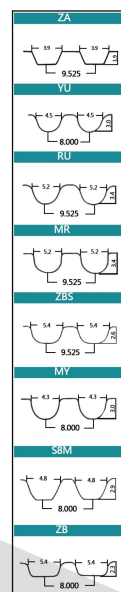

試件 Profile	尺寸 Dimension				截面 Profile
	p	hs	t	ht	
MR	9.525	5.70	2.20 ±0.25	3.40	Round tooth
RU	9.525	5.41	2.00 ±0.25	3.41	Round tooth
YU	8.000	5.30	2.25 ±0.25	3.05	Trap exoidal tooth
ZA	9.525	4.21	2.30 ±0.25	1.91	Trap exoidal tooth
ZBS	9.525	5.06	2.30 ±0.25	2.60	Trap exoidal tooth
SBM	8.000	5.30	2.25 ±0.25	2.90	Trap exoidal tooth
MY	8.000	5.21	2.15 ±0.25	3.06	Round tooth
7R	9.525	5.50	2.21 ±0.25	3.29	Trap exoidal tooth

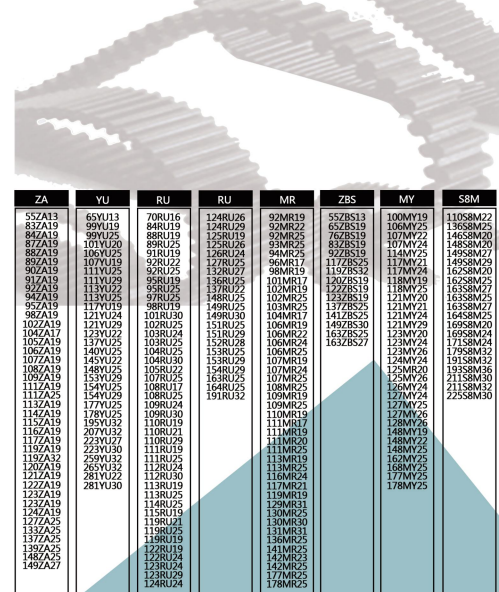

>>> 同步带 TIMING BELT

工业同步带型号与尺寸 Type & Size

同步带性能表 PROPERTY OF TIMING BELT

实验项目	TEST ITEM	节距代号 PITCH TYPE			
拉伸试验 TENSION TEST	拉伸强度 $\geq 10N/25.4mm$ TENSION STRENGTH	XL	L	H	XH
	伸长率 $\leq 5\%$ ELONGATION	1.96	2.56	6.77	9.32

注：伸长率是下表所示的截面积伸长率。Note: The elongation is under loaded up condition's elongation.

伸长试验载荷表 LOADING CAPACITY

节距型号 PITCH TYPE	XL	L	H	XH
荷载 N/25.4mm LOADING	1.57	2.16	5.39	7.46

各种型号同步带标准宽度尺寸表 (单位: mm)
STANDARD TIMING BELT WIDTH

型号 TYPE	XL	L	H	XH
代号 CODE	025031037050075100075100150200200300400			
节距宽度 BELT WIDTH	6.47.919.512.719.125.419.125.438.150.850.876.2101.6			

型号 TYPE	T 2.5	T5	AT5	T10	AT10	T20	AT20
同步带宽度 BELT WIDTH	代号 CODE	4 6 10 6 10 16 25 16 25 32 50 32 50 75 100					
宽度 BELT WIDTH	4 6 10 6 10 16 25 16 25 32 50 32 50 75 100						

型号 TYPE	3M	S3M	5M	S4.5	SSM	8M	S8M	14M	S14M	20M
同步带宽度 BELT WIDTH	代号 CODE	6 9 15 9 15 25 30 30 40 50 85 55 55 85 115 170 70 85 115 170 230 290 340								
宽度 BELT WIDTH	6 9 15 9 15 25 30 30 40 50 85 55 55 85 115 170 70 85 115 170 230 290 340									


橡胶同步带型号及断面尺寸
Type and section size of rubber synchronous belt
梯形齿工业橡胶同步带 Type of Industrial rubber synchronous belt

型号 Type	MXL	XXL	XL	L	H	XH	XXH	T2.5	T5	T10	T20	AT5	AT10	AT20
节距 Pitch	2.032	3.175	5.080	9.525	12.70	22.225	31.750	2.5	5	10	20	5	10	20
齿高 Tooth height	0.51	0.76	1.27	1.91	2.29	6.35	9.53	0.7	1.20	2.50	5.00	1.20	2.50	5.00
带厚 belt thickness	1.14	1.52	3.36	6.02	8.4	11.20	15.70	1.30	2.20	4.50	8.00	2.70	5.00	8.00
角度 2° Angle	40	50	50	40	40	40	40	40	40	40	40	50	50	50

圆齿工业橡胶同步带 Circle Arc tooth industrial rubber synchronous belt

圆齿型号 Gear code	HTD					STPD/STS					RPP/HPPD				
型号 Type	3m	5m	8m	14m	20m	S2m	S3m	S4.5m	S5m	S8m	S14m	RP2m	RP3m	RP5m	RP8m
节距 Pitch	3	5	8	14	20	2	3	4.5	5	8	14	2	3	5	8
齿高 Tooth height	1.17	2.06	3.36	6.02	8.4	0.76	1.14	1.71	1.91	3.05	5.3	0.76	1.15	1.95	3.2
带厚 belt thickness	2.4	3.8	6	10	13.2	1.36	1.9	2.81	3.4	5.3	10.2	1.36	1.9	3.5	5.5

19



Type XL

60XL	100XL	126XL	150XL	184XL	216XL	206XL	330XL
60XL	104XL	128XL	152XL	186XL	220XL	266XL	360XL
70XL	104XL	130XL	158XL	188XL	226XL	270XL	364XL
74XL	106XL	132XL	160XL	190XL	228XL	274XL	380XL
76XL	108XL	134XL	164XL	194XL	230XL	280XL	
78XL	110XL	136XL	168XL	200XL	236XL	284XL	
80XL	114XL	140XL	170XL	204XL	240XL	290XL	
86XL	116XL	142XL	172XL	206XL	246XL	300XL	
90XL	120XL	144XL	176XL	210XL	248XL	310XL	
96XL	122XL	146XL	180XL	212XL	250XL	316XL	
98XL	124XL	148XL	182XL	214XL	258XL	320XL	

Type L


124L	203L	265L	320L	360L	430L	500L	660L
135L	210L	270L	322L	367L	435L	510L	788L
146L	210L	275L	330L	375L	446L	525L	806L
150L	225L	277L	334L	382L	450L	540L	1091L
160L	230L	280L	337L	390L	453L	560L	1106L
165L	240L	285L	340L	405L	465L	570L	
170L	244L	300L	345L	410L	476L	581L	
187L	255L	304L	353L	420L	480L	600L	
191L	263L	315L	356L	427L	495L	630L	

Type H

240H	345H	440H	560H	690H	820H	1100H	1350H
250H	350H	450H	570H	700H	850H	1140H	1360H
260H	360H	460H	580H	710H	860H	1150H	1380H
270H	365H	465H	590H	720H	880H	1170H	1400H
280H	370H	470H	600H	730H	900H	1180H	1450H
290H	375H	480H	610H	740H	925H	1200H	1500H
300H	380H	490H	620H	750H	950H	1225H	1550H
310H	390H	500H	630H	760H	960H	1250H	1600H
315H	400H	510H	640H	770H	975H	1275H	1650H
320H	405H	520H	650H	780H	980H	1300H	1700H
330H	410H	530H	660H	790H	1000H	1310H	
335H	420H	540H	670H	800H	1020H	1320H	
340H	430H	550H	680H	810H	1050H	1325H	

Type XH


490XH	630XH	752XH	820XH	900XH	1300XH	1700XH
506XH	665XH	761XH	840XH	980XH	1400XH	
534XH	700XH	770XH	860XH	1000XH	1500XH	
570XH	735XH	800XH	875XH	1120XH	1600XH	




20

工业同步带型号与尺寸 Type & Size

Type T




T5-215	T5-265	T5-390	T5-600	T5-1075
T5-220	T5-280	T5-420	T5-690	
T5-225	T5-350	T5-500	T5-720	
T5-255	T5-355	T5-525	T5-860	



T10-560	T10-780	T10-920	T10-1200	T10-1420
T10-600	T10-800	T10-980	T10-1210	T10-1610
T10-610	T10-840	T10-1010	T10-1250	T10-1800
T10-700	T10-850	T10-1050	T10-1300	T10-1880
T10-720	T10-880	T10-1100	T10-1320	T10-3300
T10-750	T10-890	T10-1150	T10-1350	

Type HTD/STS



120-SM	370-SM	525-SM	630-SM	745-SM	890-SM	1140-SM	1490-SM
180-SM	385-SM	530-SM	635-SM	750-SM	900-SM	1145-SM	1500-SM
225-SM	390-SM	535-SM	640-SM	755-SM	920-SM	1175-SM	1540-SM
265-SM	395-SM	540-SM	645-SM	760-SM	925-SM	1200-SM	1580-SM
295-SM	400-SM	545-SM	650-SM	770-SM	930-SM	1215-SM	1630-SM
270-SM	410-SM	550-SM	655-SM	775-SM	940-SM	1225-SM	1690-SM
275-SM	415-SM	555-SM	660-SM	780-SM	950-SM	1235-SM	1700-SM
280-SM	420-SM	560-SM	665-SM	785-SM	960-SM	1250-SM	1750-SM
285-SM	425-SM	565-SM	670-SM	790-SM	970-SM	1260-SM	1760-SM
290-SM	430-SM	570-SM	675-SM	795-SM	980-SM	1270-SM	1800-SM
300-SM	440-SM	580-SM	680-SM	800-SM	990-SM	1280-SM	1850-SM
305-SM	445-SM	585-SM	685-SM	805-SM	1000-SM	1300-SM	2000-SM
310-SM	450-SM	590-SM	690-SM	810-SM	1010-SM	1315-SM	2050-SM
315-SM	455-SM	595-SM	695-SM	815-SM	1020-SM	1330-SM	2100-SM
320-SM	460-SM	600-SM	700-SM	820-SM	1030-SM	1350-SM	2230-SM
325-SM	465-SM	605-SM	705-SM	825-SM	1040-SM	1365-SM	2280-SM
330-SM	470-SM	610-SM	710-SM	830-SM	1050-SM	1380-SM	2300-SM
335-SM	475-SM	615-SM	715-SM	835-SM	1060-SM	1400-SM	2350-SM
340-SM	480-SM	620-SM	720-SM	840-SM	1070-SM	1420-SM	2400-SM
345-SM	485-SM	625-SM	725-SM	845-SM	1080-SM	1440-SM	2450-SM
350-SM	490-SM	630-SM	730-SM	850-SM	1090-SM	1460-SM	2500-SM
355-SM	495-SM	635-SM	735-SM	855-SM	1100-SM	1480-SM	
360-SM	500-SM	640-SM	740-SM	860-SM	1110-SM	1500-SM	
365-SM	505-SM	645-SM	745-SM	865-SM	1125-SM	1525-SM	

21

工业同步带型号与尺寸 Type & Size

312-8M	648-8M	856-8M	1048-8M	1224-8M	1480-8M	1896-8M	2504-8M
344-8M	656-8M	864-8M	1056-8M	1232-8M	1504-8M	1904-8M	2520-8M
352-8M	664-8M	872-8M	1064-8M	1240-8M	1512-8M	1920-8M	2536-8M
376-8M	672-8M	880-8M	1072-8M	1248-8M	1520-8M	1936-8M	2552-8M
390-8M	680-8M	886-8M	1080-8M	1256-8M	1535-8M	1952-8M	2600-8M
400-8M	688-8M	894-8M	1088-8M	1264-8M	1560-8M	1960-8M	2640-8M
440-8M	696-8M	912-8M	1096-8M	1280-8M	1576-8M	2000-8M	2680-8M
480-8M	704-8M	920-8M	1104-8M	1296-8M	1600-8M	2056-8M	2688-8M
496-8M	712-8M	928-8M	1112-8M	1304-8M	1616-8M	2080-8M	2720-8M
512-8M	720-8M	936-8M	1120-8M	1312-8M	1632-8M	2104-8M	2760-8M
544-8M	728-8M	944-8M	1128-8M	1320-8M	1648-8M	2160-8M	2800-8M
560-8M	736-8M	952-8M	1136-8M	1328-8M	1648-8M	2240-8M	2816-8M
568-8M	744-8M	960-8M	1144-8M	1336-8M	1660-8M	2256-8M	2856-8M
576-8M	768-8M	968-8M	1152-8M	1344-8M	1696-8M	2272-8M	2880-8M
584-8M	776-8M	976-8M	1160-8M	1360-8M	1720-8M	2280-8M	2960-8M
592-8M	784-8M	984-8M	1168-8M	1368-8M	1728-8M	2304-8M	3000-8M
600-8M	800-8M	992-8M	1176-8M	1400-8M	1760-8M	2320-8M	3040-8M
608-8M	816-8M	1000-8M	1184-8M	1416-8M	1784-8M	2360-8M	3080-8M
616-8M	824-8M	1008-8M	1192-8M	1424-8M	1800-8M	2392-8M	3120-8M
624-8M	832-8M	1016-8M	1200-8M	1440-8M	1824-8M	2400-8M	3160-8M
632-8M	840-8M	1024-8M	1208-8M	1448-8M	1840-8M	2440-8M	3200-8M
640-8M	848-8M	1040-8M	1216-8M	1456-8M	1856-8M	2480-8M	3800-8M

784-14M	1092-14M	1358-14M	1610-14M	1904-14M	2450-14M	2632-14M	2940-14M
826-14M	1120-14M	1400-14M	1680-14M	1960-14M	2492-14M	2660-14M	3010-14M
966-14M	1190-14M	1456-14M	1764-14M	2100-14M	2520-14M	2730-14M	3080-14M
1050-14M	1260-14M	1512-14M	1778-14M	2310-14M	2548-14M	2800-14M	3150-14M
1064-14M	1344-14M	1540-14M	1890-14M	2380-14M	2590-14M	1870-14M	